LUXTRAN™

DLL996 SERIES

PRODUCT FEATURES:

- » Surface ceiling mount $-9"\times96"$ (22.86 cm \times 244 cm)
- » Stainless steel construction for corrosion resistance
- » Drop dish clear polycarbonate lens



PROJECT INFORMATION Job Name Fixture Type Catalog Number Approved by

SPECIFICATIONS:

HOUSING: 18-gauge, one-piece seam welded type 304 stainless steel construction. Brushed finish.

REFLECTOR: 20-gauge CRS. White TGIC polyester powder coat - 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%.

LENS: Thermal formed 0.125" (.32 cm) polycarbonate clear lens. Lens silicone sealed to doorframe and secured with continuous lens retention angles.

DOORFRAME: 18-gauge brushed stainless steel. Continuous stainless steel piano hinge.

ELECTRICAL: Electronic ballast <10% THD standard. See Ordering Information for multiple ballasts and optional equipment. Lamps by others.

FASTENERS: Torx® Head stainless steel fasteners standard. See Options for stainless steel center-pin reject Allen Head (AH) or Phillips Head (PH) fasteners.

INSTALLATION: For housing without wiring and mounting holes, see Field Drilled Installation Holes Option (FDIH).

WARRANTY: Limited one (1) year Kenall flourescent warranty.

LISTINGS: UL and CUL listed for Wet Location.



ORDERING INFORMATION (Ex: DLL9-96-1-86-IS-1-120)


Model DLL9	Length 96	Lamp Quantity	Lamp Type	Balla	st Type	Ballast Quantity	Volta	ge Options
	Nominal Length	Lamp Quantity			ast Type		Volta	
	96 8' (244 cm)	1 One Lamp 2 Two Lamps		IS RS		art Electronic <10% THD (STD) t Electronic <10% THD	120 277	120 Volts 277 Volts
		2 IWO Lamps		SB	Specified E		211	277 VOILS
		Lamp Type					Optio	ons
		86 F96T8HO		Balla	ast Quantit	y	EĹ	Standard Lumen EL Pack
				1	One		PEL	High Lumen EL Pack
				2	Two		SEL	Specified EL Pack
							ΑH	Allen Head with center pin fastene
							FDIH	Field Drilled Installation Holes
							FS	Single Fuse & Holder
							PH	Phillips Head fasteners
							PSS	Painted Stainless Steel Housing

DIMENSIONAL DATA

CROSS SECTION

9.312" 23.65 cm 3.875" 9.84 cm 6.827" 17.34 cm

MOUNTING HOLES

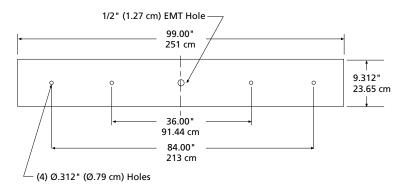

SSIN Stainless Steel Interior

