

HIGH ABUSE


HASECI SERIES – LF CORNER MOUNT – INSET DOOR

PROJECT INFORMATION

Job Name _____
 Fixture Type _____
 Catalog Number _____
 Approved by _____

PRODUCT FEATURES:

- » Surface corner mount – 8" x 48"
- » One-piece inset doorframe, secured to housing with continuous piano hinge and Torx® fasteners
- » 20-gauge hole-free, one-piece cold rolled steel housing
- » Closed cell extruded silicone gasket seals doorframe to housing
- » Peace of Mind Guarantee® against breakage
- » UL certified IP65 per IEC 60598



SPECIFICATIONS:

HOUSING: 20-gauge CRS. Hole-free three-piece seam welded construction. White TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%.

LENS: See Lens Options below to specify lens material. Lens sealed to doorframe with silicone sealant and secured with continuous lens retention system. Lens orientation – smooth side out. Minimum .187" polycarbonate lens required (max. .375") for Peace of Mind Guarantee®.

DOORFRAME: 18-gauge CRS. One-piece inset construction welded corners. White TGIC polyester powder coat – 5-stage pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%. Doorframe secured to housing with continuous hinge and 3 tamper-resistant stainless steel Torx® with center pin fasteners.

DOORFRAME GASKET: Closed cell extruded silicone gasket seals doorframe to housing.

ELECTRICAL: Fluorescent electronic ballasts (<10% THD). Lamps by others. See Electrical Options for additional options.

INSTALLATION: Four .312" holes for surface mounting.


LISTINGS: UL and CUL Listed for Wet Location. UL certified IP65 per IEC 60598.



ORDERING INFORMATION (Ex: HASECI14-2-54-RS-1-120-5F-2H-9)

Model	Lamp Qty/Type	Ballast Type	Ballast Qty	Voltage	Doorframe Option	Housing	Lens Type	Options
HASECI14								
Lamp Quantity/Type		Ballast Type			Doorframe Options			Options
1-28 One F28T5		IS Instant Start Electronic <10% THD (T8)			2F 18-Ga CRS Painted (STD)			EL* Standard Lumen One-Lamp EL Pack
2-28 Two F28T5		RS Rapid Start Electronic <10% THD (T8,T5,T5HO)			5F 20-Ga Type 304 SS			PEL* High Lumen One-Lamp EL Pack
3-28 Three F28T5		SB Specified Ballast						SEL* Specified EL Pack
1-32 One F32T8					Housing Options			DLN LED Night Light w/Light Level Control (100%-20%)
2-32 Two F32T8					2H 20-Ga CRS (STD)			FS* Single Fuse & Holder
3-32 Three F32T8		Ballast Quantity			5H 20-Ga Type 304 SS Brushed			HJ Sealed Wireway
1-54 One F54T5HO		1 One						RF Radio Frequency Filter
2-54 Two F54T5HO		2 Two			Lens Type			TH 1/2" Trade Size Threaded Hub (Lamp supplied by other)
3-54 Three F54T5HO					Polycarbonate			TN PL Night Light – 5/7/9 Watt (Lamp supplied by other) (120/277V only)
		Voltage			6 .187" #12 Prismatic Polycarbonate			
		120 120 Volts			9 .250" Clear Polycarbonate			
		277 277 Volts			1/9 .125" #12 Prismatic Acrylic inside lens			
		347 347 Volts			.250" Clear Polycarbonate outside lens			
					Specified Lens			
					SL Specified Lens			* n/a with three (3) F54T5HO lamps

DIMENSIONAL DATA

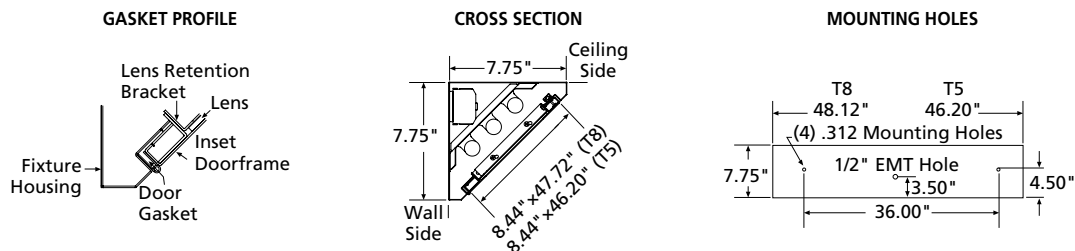

www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA

A brand of **legrand**

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2019 Kenall Mfg. Co.