

SIMPLESEAL™

HSEFO SERIES – LF FLANGE MOUNT – OVERLAPPING DOOR

PRODUCT FEATURES:

- » Recessed ceiling mount – flange ; 1'x4', 2'x2', 2'x4'
- » 20-gauge, hole-free one-piece cold rolled steel housing
- » Closed cell extruded silicone gasket seals doorframe to housing
- » Hazardous Location Listings include Class I, Division 2, Groups A, B, C, D, Class II, Division 2, Groups F, G and Class III.



PROJECT INFORMATION

Job Name _____

Fixture Type _____

Catalog Number _____

Approved by _____

SPECIFICATIONS:

HOUSING: 20-gauge CRS. Hole-free one-piece seam welded construction. White TGIC polyester powder coat finish – 5-step pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%.

LENS: .125" #12 high impact acrylic lens sealed to perimeter ledge of lens aperture with silicone sealant and secured with continuous lens retention system. Lens orientation – smooth side out. See Options for alternate lens selections. If required, specify lens overlay combinations inner/outer (Example: R/T).

DOORFRAME: 20-gauge CRS. One-piece 60° beveled perimeter construction. Continuous angle lens retention system. Mechanical guide for doorframe fastener alignment. Doorframe secured to housing with stainless steel aircraft cables and (8) for 2x2, (10) for 1x4, or (12) for 2x4 captive flush mounted Phillips head stainless steel fasteners. White TGIC polyester powder coat finish – 5-step pre-treatment. Salt spray test: 1,000 hours; Reflectance: 92%. Doorframe Gasket one-piece closed cell extruded silicone gasket seals doorframe to housing and ceiling structure.

ELECTRICAL: Quantity and type as specified – see ordering information. All ballasts UL listed class P. Wireway hole provided with hub/ring assembly. See Ordering Information for alternate or multiple ballasts and optional equipment. Lamps by others.

INSTALLATION: Adjustable swing-out mounting brackets standard. See Options for continuous row mounting and plaster frames.

WARRANTY: Limited one (1) year Kenall fluorescent warranty.

LISTINGS: UL and CUL Listed for Wet Location. UL certified IP65 per IEC 60598. Meets K230 Leakage Standard for luminaire leakage in pressurized environments and FED-STD-209E/Class 100 (ISO 5) Cleanrooms. Standard Hazardous Location Listings include Class I, Division 2, Groups A, B, C, D; Class II, Division 2, Groups F, G (and Simultaneous Presence); and Class III. CCEA Approved.



ORDERING INFORMATION (Ex: HSEFO14-2-32-IS-1-120-2F-2H-U)

Model	Lamp Qty/Type	Ballast Type	Ballast Qty	Voltage	Doorframe Option	Housing	Lens Type	Options
Model		Ballast Type			Doorframe Options		Lens Type	
HSEFO14 1'x4'		IS Instant Start Electronic <10% THD (T8)			2F 20-Ga CRS (STD)		Acrylic	
HSEFO22 2'x2'		RS Rapid Start Electronic <10% THD			5F 20-Ga Type 304 SS		T .125" Clear	
HSEFO24 2'x4'		SB Specified Ballast			XF 20-Ga Type 316 SS		U .125" #12 Prismatic High Impact Acrylic (STD)	
					PAF .063" Painted Fabricated Aluminum		Polycarbonate	
Lamp Quantity/Type		Ballast Quantity			Housing/Flange Options		2 .125" #12 Prismatic	
1x4		1 One			2H 20-Ga CRS (STD)		G .125" Clear	
1-32 One F32T8		2 Two			5H 20-Ga Type 304 SS		Tempered Glass	
2-32 Two F32T8		Voltage			XH 20-Ga Type 316 SS		TG .250" Textured Tempered Glass	
3-32 Three F32T8		120 120 Volts			PAH .050" Painted Aluminum		Specified Lens	
2x2		277 277 Volts					SL Specified Lens	
2-17 Two F17T8		347 347 Volts					Options	
3-17 Three F17T8							EL* One-Lamp Indoor Battery Pack (32°F)	
4-17 Four F17T8							FS Fuse & Holder	
2x4							RF Radio Frequency Filter	
2-32 Two F32T8							TN 5/7/9 Watt Night Light (FL)	
3-32 Three F32T8							PF Plaster Frame	
4-32 Four F32T8							RM Continuous Row Mounting	
6-32 Six F32T8								

* n/a with 347 Volts



www.kenall.com | P: 800-4-Kenall | F: 262-891-9701 | 10200 55th Street Kenosha, Wisconsin 53144, USA


A brand of **legrand**

This product complies with the Buy American Act: manufactured in the United States with more than 50% of the component cost of US origin. It may be covered by patents found at www.kenall.com/patents. Content of specification sheets is subject to change; please consult www.kenall.com for current product details. ©2022 Kenall Mfg. Co.

HSEFO_14_22_24-021423

SIMPLESEAL™
HSEFO SERIES – LF FLANGE MOUNT – OVERLAPPING DOOR

DIMENSIONAL DATA

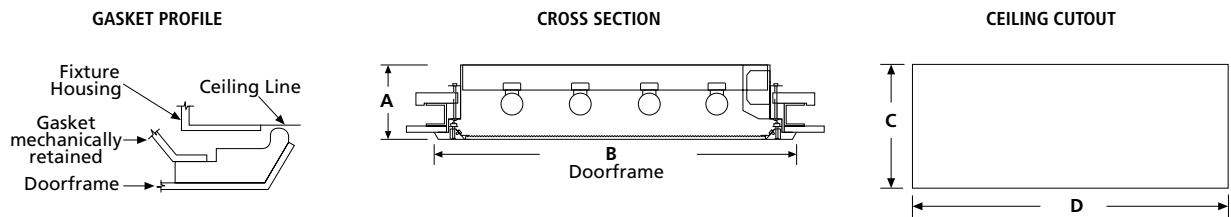

DIMENSIONAL DATA (IN INCHES)				
	A	B	C	D
1x4	4.75	13.60x49.72	12.10	48.22
2x2	4.75	25.60x25.72	24.10	24.22
2x4	4.75	25.60x49.72	24.10	48.22

